| TAN | DEM BACK REST & BAR KIT | APPLICATION : Dio110 (JF31) | | |
|--------|---|-----------------------------|--|--|
| CODE | TANDEM BACK REST & BAR 652-1427000 (OSS-ZH-08015100) | | | |
| | TANDEM BAR 652-1427900 (OSS-ZH-08014400) | | | |
| DEMARK | It is able to install only tandem har or back rest | | | |
| | ※Unable to install with KITACO rear carrier together. | | | |

Thank you for purchasing Kitaco product. Read and understand the instruction before installing.

ATTENTION (MUST READ)

- •This instruction sheet is for the instruction for stock condition.
- •This product is for grip and back rest in use when tandem. Do not apply excessive force to back rest. It might cause of breaking this product or surrounding parts.
- •This product is designed and made exclusive for application model, do not use other models. Do not modify the way which is not listed or it will cause damage and trouble.
- •We are not responsible for violation of law or damages and accidents caused by assembling mistake and improper setting.
- •Please ask authorized mechanic for assembling and setting.
- Refer to the manufacturer service manual when installation.
- •Bolts and nuts may get loosen by engine vibration. Make sure not to loosen any bolts and nuts before driving.

UNEVEN BRIGHTNESS

There might be uneven brightness because of polishing treatment, but it is not defective product.

| PACKING LIST | | | | | | | | |
|--------------|---|---------------------------|-----|---|-----------------|--|--|--|
| 652-1427000 | TANDEM BACK REST & BAR KIT ↓ TANDEM BAR | | | | | | | |
| CODE | NAME | | QTY | | REMARK | | | |
| 652-1427009 | TANDEM BAR | | 1 | 1 | | | | |
| 093-0100008 | SPACER COLLAR | 20 × 17 Φ 8 | 4 | 4 | | | | |
| 080-0550060 | BUTTON CAP BOLT | M8 × 60 | 2 | 2 | | | | |
| 652-1427109 | TANDEM PAD STAY | | 1 | - | | | | |
| 080-0560045 | FLANGE CAP BOLT | M8 × 45 | 2 | 2 | | | | |
| 001-0552008 | FLANGE NUT | 8mm | 2 | 2 | | | | |
| 652-0500010 | PAD | | 1 | - | | | | |
| 001-0550008 | FLANGE LOCK NUT | 8mm | 2 | - | For fixing pad. | | | |
| 090-0902008 | WASHER 8 | \times 22 \times T2.3 | 2 | - | For fixing pad. | | | |
| - | CR SPONGE (Sponge for | or interface.) | 2 | 2 | | | | |




HOW TO INSTALL

- If there is a hard degradation like a blem, fatigue and wear etc on the reuse parts, please change to new ones.
- •Illustration is tandem back rest & bar kit. it is as same as installing only tandem bar or back rest.

OInstall this product on the rear spoiler with attached bolts.

*When installing tandem bar, tighten installation bolt diagonally evenly.

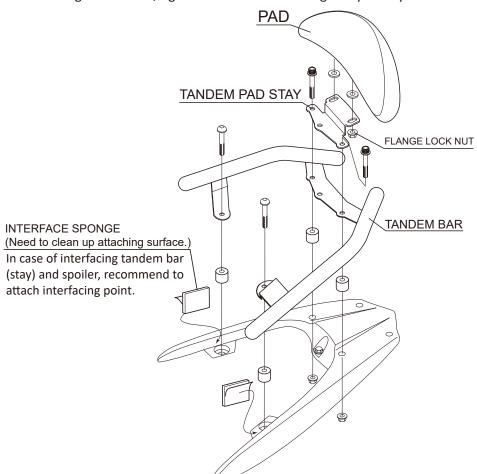

ATTENTION!

- •Tandem bar is made by stainless steel, it might get rust as well as how to use. Especially after riding under the rain or wash, wipe water completely and apply anti-rust, etc.
- •This product cannot have toughness because of the vehicle structure. Do not apply excessive force to carrier and back rest such as using rope or tie to deliver the vehicle. In case of using as back rest, please use as supporting parts.