

FENDER LESS KIT

CODE : 691-1427000 (OSS-ZH-07973500)

APPLICATION : Dio110 (JF31)

REMARK : When installing this product, cutting rear under cover process is required.

●Thank you for purchasing Kitaco product. Read and understand the instruction before installing.


ATTENTION (MUST READ)

- This instruction sheet is for the instruction for stock condition.
- This product is for dress-up. Do not use for other purposes.
- This product is designed and made exclusive for application model, do not use other models. Do not modify the way which is not listed or it will cause damage and trouble.
- We are not responsible for violation of law or damages and accidents caused by assembling mistake and improper setting.
- Please ask authorized mechanic for assembling and setting. Ask a specialist at specialty shop if you do not understand the role of the surrounding parts.
- Refer to the manufacturer service manual when installation.
- Bolts and nuts may get loosen by engine vibration. Make sure not to loosen any bolts and nuts before driving.


HOW TO INSTALL

- ※Be careful not to break claw of covers when removing/installing.
- 1) Remove stock rear fender and covers. (Remove parts that ease to installation.)
- ※Lighting harness is connected with coupler or terminal. Disconnect couplers.
- 2) Cut the rear under cover.
- 3) Install attached fender less parts and license light (stock). (Refer to the illustration.)
- ※Install fender less parts while bolts are temporarily tightened.
- ※After route and connect each wire, if the wires are left, tighten to frame by tie wrap not to hang down.
- 4) Tighten temporarily tightened bolts firmly. Make sure the tail lamp, winker work correctly before riding.

OUTER COWLS REMOVING/INSTALLING ILLUSTRATION (Illustration is just a reference. Please refer to the service manual.)

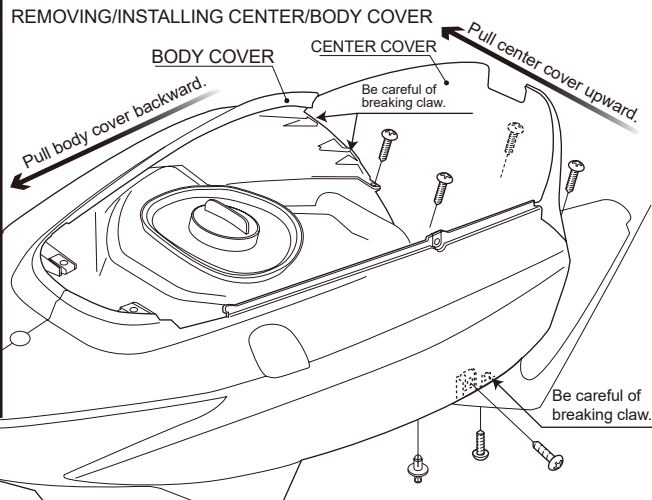

REMOVING REAR FENDER&UNDER COVER

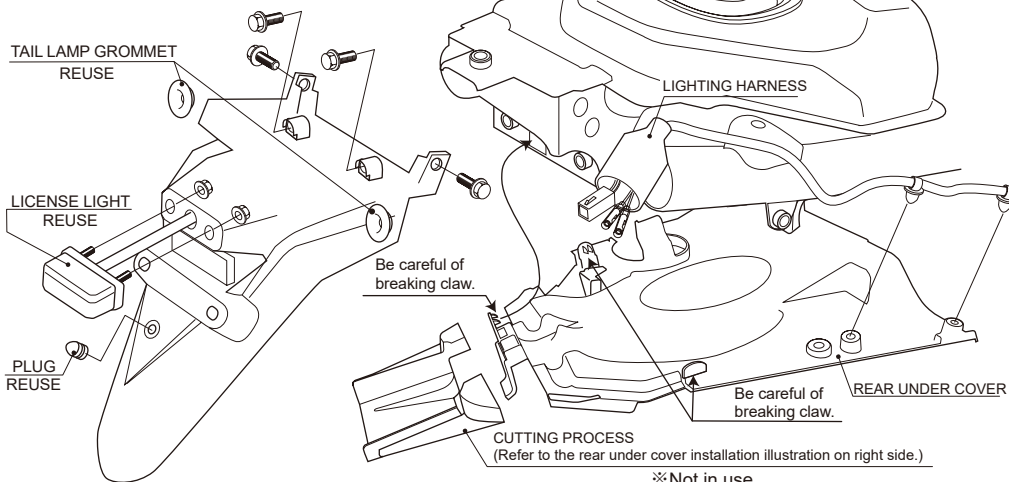

PACKING LIST

FIGURE	NAME	CODE	個数
1	FENDER LESS PLATE (A)	691-1427001	× 1
2	FENDER LESS PLATE (B)	691-1427002	× 1
3	RUBBER COLLAR φ 8.2 × 18 × T3	0900-094-09809	× 4
4	REFLECTOR 19 × 98mm	801-0800003	× 1
5	FLAT HEAD BOLT M5 × 15	052-0500015	× 2
6	NUT 5mm	001-0540005	× 2
7	WASHER 5mm	090-0903005	× 2
8	CAP BOLT M6 × 12	060-0500012	× 2
9	SPRING WASHER 6mm	091-0500006	× 2
10	NUT 6mm	001-0500006	× 2


STOCK PARTS (REUSE)

FIGURE	NAME	QTY
N1	PLUG	× 1
N2	REAR FENDER BOLT	× 4
N3	TAIL LAMP GROMMET	× 2
N4	LICENSE LAMP NUT	× 1


Install fender less kit in the reverse order of removing stock rear fender.

※Basically, reuse genuine parts if it is unattached.

※If there is a hard degradation like a blem, fatigue and wear etc on the reuse parts, please change to new ones.

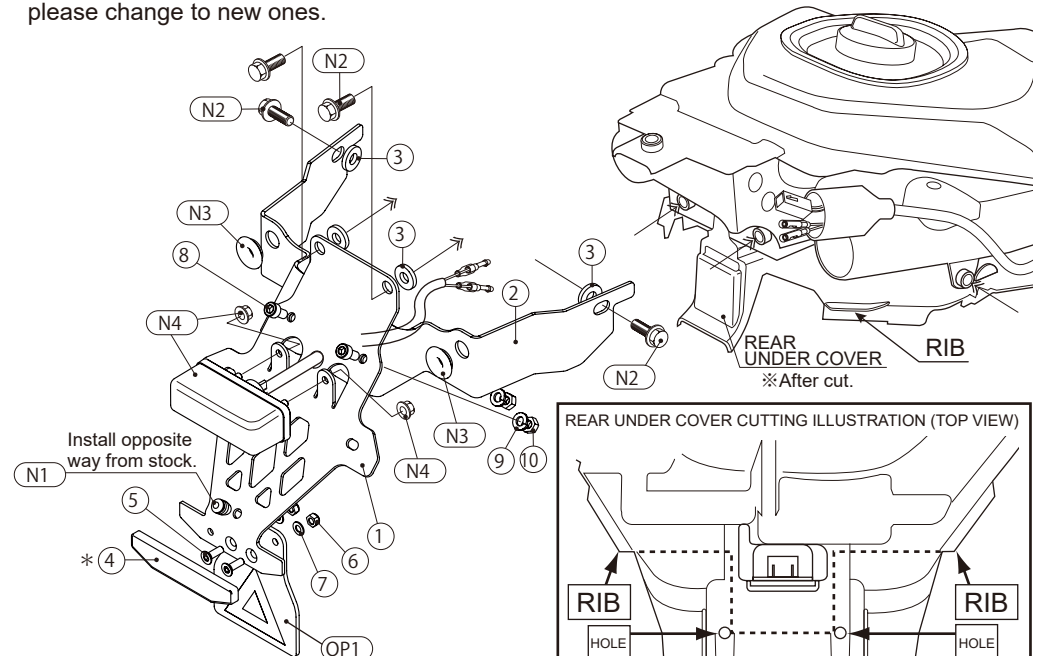

REAR UNDER COVER CUTTING ILLUSTRATION (TOP VIEW)

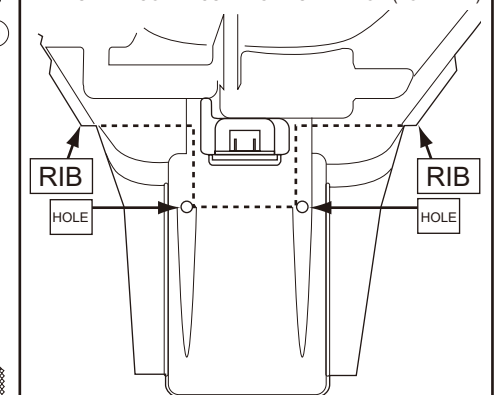

DOTTED LINE : CUTTING LINE
Please cut referring to dotted shape on illustration and rib, hole position.
(It is not a problem that some distortion and over cutting.)

ADVICE!

※One of the reason of unable to install fender less stay correctly is touching under cover. In that case, check the cutting shape of rear under cover and cut the touching point.

110628 M-T